
New Combined Format of Injection Well Geologic Isolation

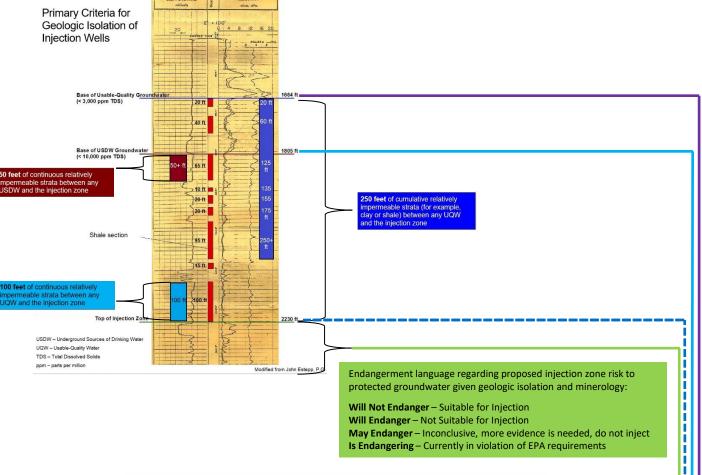

May Endanger – Inconclusive, more evidence is needed, do not inject Is Endangering – Currently in violation of EPA requirements

	GROUNDWATER	PROTECTION DETERMINATIO	N Form G	6W-2	
	Grou	ndwater Advisory Unit			
_					
Date Issued:	10 March 2021	GAU Number:	296480		
Attention:	STATE OF TEXAS	API Number:	12345678		
	123 Sam View Dr.	County:	Martin		
	Canada, TX 12345	Lease Name: Lease Number:	Bodacious SWD		
Operator No.:	012345	Well Number:	1		
		Total Vertical	2300		
		Latitude:	32.164950		
		Longitude:	-101.981790		
		Datum:	NAD27		
	uality groundwater at this locatio	; Abstract-A-0000; Block-22; Sec n, the Groundwater Advisory Un	tion-1	_	
To protect usable-q Texas recommends	uality groundwater at this locatio	n, the Groundwater Advisory Un	it of the Railroad Commission of		
To protect usable-q Texas recommends The Base of Usab the site of referenc	uality groundwater at this locatio te-Quality Water-bearing (BUQ ed well.	n, the Groundwater Advisory Un W) strata is estimated to occu	it of the Railroad Commission of ir at a depth of 1,664 feet at		
To protect usable-q Texas recommends The Base of Usab the site of referenc The BASE OF UND	uality groundwater at this locatio te-Quality Water-bearing (BUQ ed well.	n, the Groundwater Advisory Un W) strata is estimated to occu RINKING WATER (USDW) is es	it of the Railroad Commission of ir at a depth of 1,664 feet at	•	
To protect usable-q Texas recommends The Base of Usab the site of referenc The BASE OF UND 1,805 feet at the site	uality groundwater at this locatio te-Quality Water-bearing (BUQ ed well. ERGROUND SOURCES OF D to the referenced well. (For UI	n, the Groundwater Advisory Un W) strata is estimated to occu RINKING WATER (USDW) is es	it of the Railroad Commission of ir at a depth of 1,664 feet at timated to occur at a depth of	•	
To protect usable-q Texas recommends The Base of Usab the site of referenc The BASE OF UND 1,805 feet at the site Geologic Isolation o Injection into the si	te-Quality Water-bearing (BUQ ed well. ERGROUND SOURCES OF D e of the referenced well. (For UI cours at 2,230 feet measured do ubsurface interval 2,235 - 4,100	n, the Groundwater Advisory Un W) strata is estimated to occu RINXING WATER (USDW) is es C Purpose Only) epth at the site of the referenced feet, as listed on the W14 applici	it of the Railroad Commission of Ir at a depth of 1,664 feet at timated to occur at a depth of well. (For UIC Purpose Only) ation dated March 10, 2021,	4	
To protect usable-q Texas recommends The Base of Usab the site of referenc The BASE OF UND 1,805 feet at the site Geologic Isolation o Injection into the si	te-Quality Water-bearing (BUQ ed well. ERGROUND SOURCES OF D e of the referenced well. (For UI cours at 2,230 feet measured do ubsurface interval 2,235 - 4,100	n, the Groundwater Advisory Un W) strata is estimated to occu RINKING WATER (USDW) is es C Purpose Only) epth at the site of the referenced	it of the Railroad Commission of Ir at a depth of 1,664 feet at timated to occur at a depth of well. (For UIC Purpose Only) ation dated March 10, 2021,	•	
To protect usable-q Texas recommends The Base of Usab the site of referenc The BASE OF UND 1,805 feet at the site Geologic Isolation o Injection into the si WILL NOT ENDANC	uality groundwater at this locatio te-Quality Water-bearing (BUQ ed well. DERGROUND SOURCES OF D e of the referenced well. (For UI occurs at 2,230 feet measured dr ubsurface interval 2,235 - 4,100 3ER the freshwater strata in this	n, the Groundwater Advisory Un W) strata is estimated to occu RINXING WATER (USDW) is es C Purpose Only) epth at the site of the referenced feet, as listed on the W14 applici	it of the Railroad Commission of ir at a depth of 1,664 feet at timated to occur at a depth of well. (For UIC Purpose Only) ation dated March 10, 2021, ct information below *		
To protect usable-q Texas recommends The Base of Usab the site of referenc The BASE OF UND 1,805 feet at the site Geologic Isolation o Injection into the si WILL NOT ENDANC	uality groundwater at this locatio te-Quality Water-bearing (BUQ ed well. DERGROUND SOURCES OF D e of the referenced well. (For UI occurs at 2,230 feet measured dr ubsurface interval 2,235 - 4,100 3ER the freshwater strata in this	n, the Groundwater Advisory Un W) strata is estimated to occu RINKING WATER (USDW) is es C Purpose Only) epth at the site of the referenced feet, as listed on the W14 applic area. For questions, see conta	it of the Railroad Commission of ir at a depth of 1,664 feet at timated to occur at a depth of well. (For UIC Purpose Only) ation dated March 10, 2021, ct information below *		
To protect usable-q Texas recommends The Base of Usab the site of referenc The BASE OF UND 1.805 feet at the site Geologic Isolation o "Injection into the sit WILL NOT ENDANC This recommendation Note: Unless stated	uality groundwater at this location te-Quality Water-bearing (BUQ ed well. DERGROUND SOURCES OF D of the referenced well. (For UI cours at 2,230 feet measured do ubsurface interval 2,235 - 4,100 DER the freshwater strata in this on is applicable to all wells within	n, the Groundwater Advisory Un W) strata is estimated to occu RINXING WATER (USDW) is es C Purpose Only) epth at the site of the referenced feet, as listed on the W14 applici area. For questions, see contain a radius of 200 feet of this local	it of the Railroad Commission of r at a depth of 1,664 feet at timated to occur at a depth of well. (For UIC Purpose Only) ation dated March 10, 2021, t information below * ion.		
To protect usable-q Texas recommends The Base of Usab the site of reference The BASE OF UND 1,805 feet at the site Geologic Isolation o "Injection into the si WILL NOT ENDANC This recommendation Note: Unless stated Unless stated other This determination information has ch	uality groundwater at this location te-Quality Water-bearing (BUQ ed well. DERGROUND SOURCES OF D e of the referenced well. (For UI cours at 2,230 feet measured du ubsurface interval 2,235 - 4,100 3ER the freshwater strata in this on is applicable to all wells within to otherwise, this recommendation wise, this recommendation is for is based on information provid	n, the Groundwater Advisory Un W) strata is estimated to occu RINKING WATER (USDW) is es C Purpose Only) epth at the site of the referenced feet, as listed on the W14 applici area. For questions, see conta in a radius of 200 feet of this locat in is intended to apply to wells dri r normal drilling, production, and ed when the application was si	it of the Railroad Commission of r at a depth of 1,664 feet at timated to occur at a depth of well. (For UIC Purpose Only) ation dated March 10, 2021, t information below * ion.	t well	
To protect usable-q Texas recommends The Base of Usab the site of reference The BASE OF UND 1,805 feet at the site Geologic Isolation o Injection into the si WILL NOT ENDANC This recommendation Note: Unless stated Unless stated other This determination Information has ch If you have question	uality groundwater at this location te-Quality Water-bearing (BUQ ed well. DERGROUND SOURCES OF D e of the referenced well. (For UI occurs at 2,230 feet measured du ubsurface interval 2,235 - 4,100 3ER the freshwater strata in this on is applicable to all wells within o otherwise, this recommendation is o use, this recommendation is for is based on information provid arged, you must contact the G	n, the Groundwater Advisory Un W) strata is estimated to occu RINKING WATER (USDW) is es C Purpose Only) epth at the site of the referenced feet, as listed on the W14 applici area. For questions, see conta in a radius of 200 feet of this locat in is intended to apply to wells dri r normal drilling, production, and ed when the application was si	it of the Railroad Commission of ir at a depth of 1,664 feet at timated to occur at a depth of well. (For UIC Purpose Only) ation dated March 10, 2021, at information below * bion. lied within 200 feet of the subject plugging operations only. bibmitted on 03/10/2021. If the k	t well	